



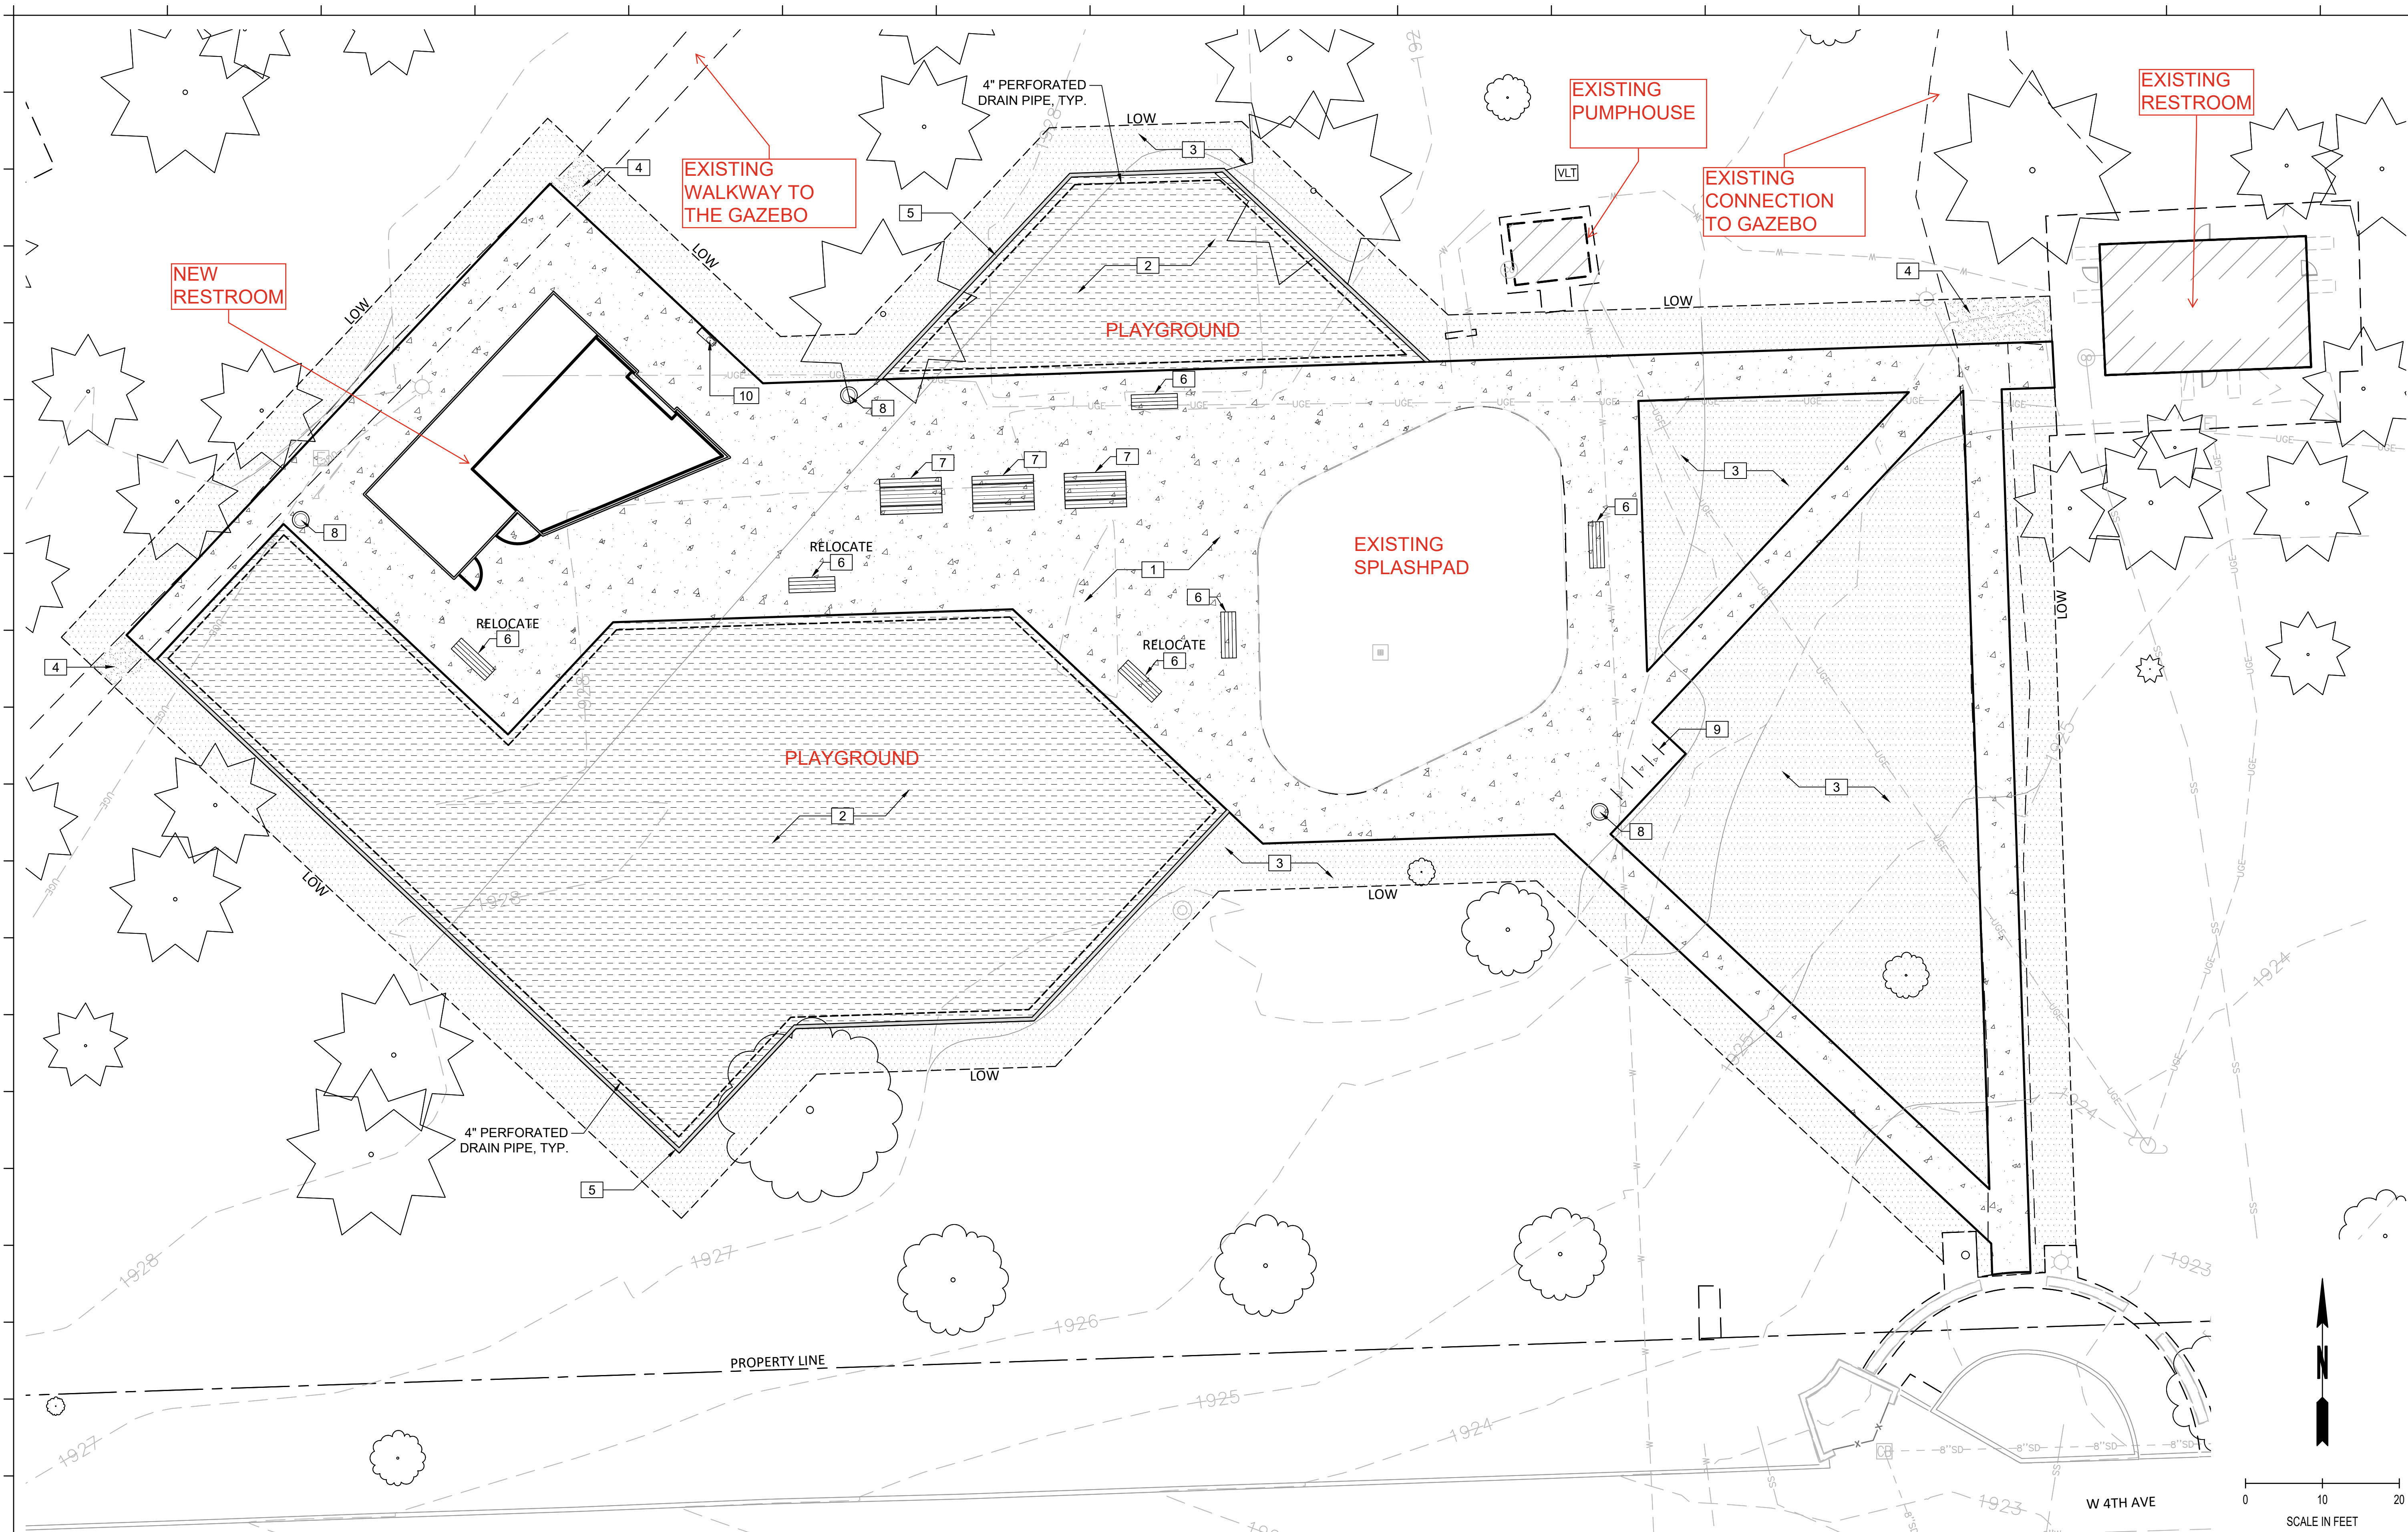

SITE MATERIALS SCHEDULE

SYMBOL	CODE	DESCRIPTION	QTY	DETAIL	CODE	DESCRIPTION	QTY	DETAIL	CODE	DESCRIPTION	QTY	DETAIL
	1	CIP CONCRETE	7,511 SF	1/9		BENCH 3 EXISTING BENCHES ON SITE TO BE RELOCATED TO BENCHES LABELED "RELOCATE" ON PLAN. REMAINING 3 BENCHES TO BE NEW. MODEL: PARK WAREHOUSE 6" ALUMINUM BENCH WITH BACK - SEE SPECIFICATIONS	6	5/9		TRASH RECEPTACLE MODEL: PARK WAREHOUSE FLARE TOP TRASH RECEPTACLE - SEE SPECIFICATIONS	3	7/9
	2	PLAY SURFACING	6,766 SF							BIKE RACK MODEL: PARK WAREHOUSE RADIUS BIKE RACK - SEE SPECIFICATIONS	5	8/9
	3	HYDROSEED AREAS OF DISTURBANCE	7,537 SF			PICNIC TABLE MODEL: DUMOR PRODUCTS TABLE 443-62 6" STEEL PICNIC TABLE. 2 BENCHES 806 LBS - SEE SPECIFICATIONS	3	6/9		DRINKING FOUNTAIN EXISTING DRINKING FOUNTAIN TO BE RELOCATED AND REINSTALLED	1	
	4	GRAVEL REPLENISH AREAS OF DISTURBANCE	133 SF									
	5	PLAY AREA CURB	276 LF									

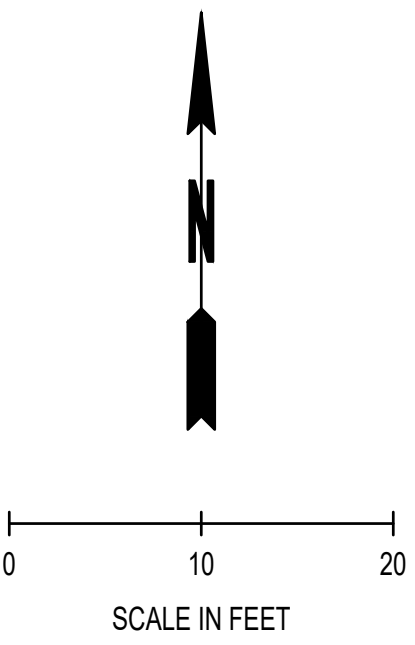

CITY OF
SPOKANE
PARKS & RECREATION

SCJ ALLIANCE
CONSULTING SERVICES
108 N WASHINGTON, SUITE 300,
SPOKANE WA 99201
P: 509.835.3770
SCJALLIANCE.COM

PLAYGROUND AND RESTROOM REPLACEMENT
COEUR D'ALENE PARK
2195 W. 2ND AVENUE,
SPOKANE, WA 99201

MATERIALS PLAN

BAR IS ONE INCH ON ORIGINAL
DRAWING. IF NOT ONE INCH ON
THIS SHEET, ADJUST SCALES
ACCORDINGLY

DATE:
6/29/2026

DRAWN BY:
J. GILLELAND

CHECKED BY:
K. CASH

PROJECT NO:
_25-000507 SP-01

REVISION

1	
2	
3	
4	

SHEET 7 OF 11

L-2

07/02/2026